


IF IN DOUBT ASK  
DO NOT SCALE

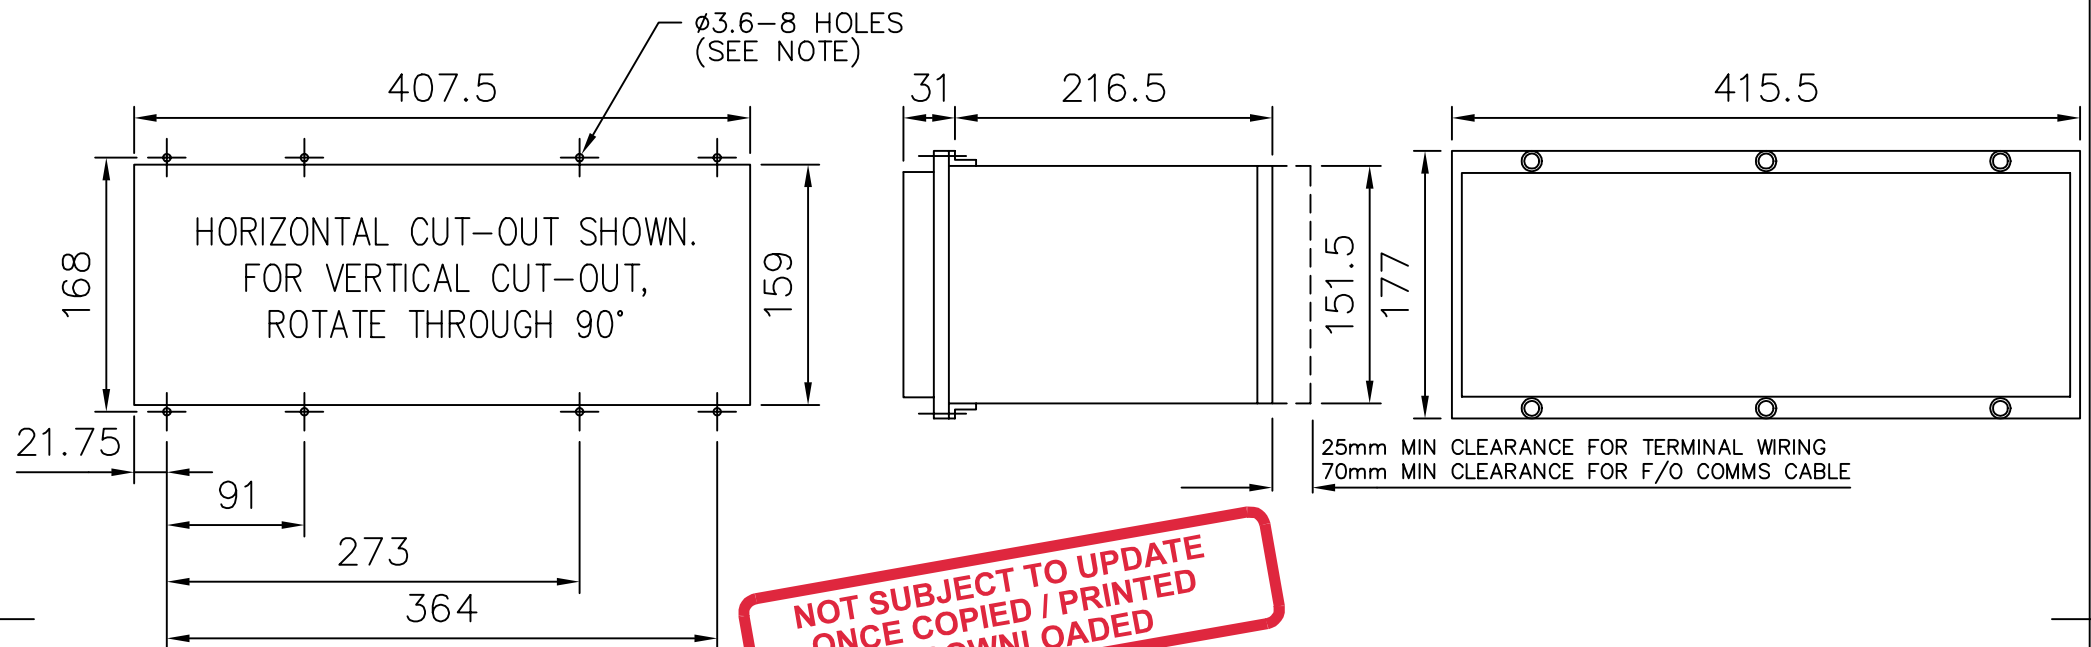

**NOT SUBJECT TO UPDATE  
ONCE COPIED / PRINTED  
OR DOWNLOADED**

NOTE:  
THE  $\phi 3.6$  HOLES ARE FOR M4 THREAD FORMING (TRILOBULAR) SCREWS. THESE ARE SUPPLIED AS STANDARD AND ARE SUITABLE FOR USE IN FERROUS/ALUMINIUM PANELS 1.6mm THICK AND ABOVE. FOR OTHER PANELS, HOLES TO BE M4 CLEARANCE (TYPICALLY  $\phi 4.5$ ) AND RELAYS MOUNTED USING M4 MACHINE SCREWS, NUTS AND LOCKWASHERS (SUPPLIED IN PANEL FIXING KIT).

DRAWING OFFICE ONLY NOTE

ANY CHANGE TO THIS DRG MUST BE REFLECTED ON DRG 2995X10018 & CATALOGUE

4	RDW	23/05/03	MN995/2531 MM
3		21/1/03	MN995/2462 ML
2		30/7/01	MN995/2125
1		15/07/99	CHANGE
ISSUE	DATE	NOTED	△

Copyright © 1999 Reyrolle Ltd.

**MATERIAL:**

Dimensions in millimetres : Surface texture in micrometres. Machine where marked ✓ For explanation of dimensions, tolerances, notes etc. see B.S.308. Limit on untoleranced unmachined dimensions ± _____ Limits on untoleranced machined dimensions to B.S.4500; i.e. up to 6±0.1; over 30 to 120±0.3; over 315±0.8; over 6 to 30±0.2; over 120 to 315±0.5; General unmachined angular tolerance ± _____	Finish:	Title: <b>OVERALL DIMENSIONS AND PANEL DRILLING          FOR EPSILON E16 CASE</b>	First used on:									
	Treatment:		<b>Reyrolle Protection          Hebburn.</b>	Similar Articles: Supersedes: Original Scale: NTS Drg.No. <b>2995X10016</b>								
DRAWN: T.CARR	CHECKED:	APPROVED: R.D.WATSON	DATE: 11/07/02	I.E.	OPS.	PCP.	Purch. Spec.	TQ.	EAC	CE.	STD.	A4h