

TDDB-relay - Instantaneous 2 pole & timer, delay-on, 2 pole

Datasheet

Part of universal timer relay D-platform



Description

Plug-in industrial electronic timer relay with two instantaneous change-over contacts and two time delayed change-over contacts. When the relay is activated there is a delay on pull-in for the time delayed contacts. The delay time is adjustable with a lockable knob. The relay can also be supplied with a fixed time delay (no knob). The relay is equipped with two LEDs to indicate presence of power supply and energizing of the coil.

The construction of the relay and choice of materials make the TDDB relay suitable to withstand low and high temperatures, shock & vibrating and dry to humid environments.

No external retaining clip needed as integrated 'snap-lock' will hold relay into socket under all circumstances and mounting directions.

Compact design, choice of many options and a wide range of sockets make the TDDB relay an easy and flexible solution to use.

Application

These relays are designed for demanding power utility applications. The TDDB is used in applications where instantaneous contacts and contacts with a time delay in output are necessary.

Features

- Time delay and instantaneous relay
- Compact plug-in design
- 2 C/O contacts with delay on pull-in and 2 C/O instantaneous contacts
- Delay time adjustable with a lockable knob
- Also available with fixed time delay (no knob)
- Suitable for DC and AC input (50/60 Hz)
- Two LEDs for status indication
- Flat, square and silver plated relay pins for excellent socket connection
- Integrated snap lock
- Optional positive mechanical keying relay to socket

Benefits


- Proven reliable
- Long term availability
- Low life cycle cost
- No maintenance

Industry compliancy



- IEC 61812-1 Time relays for industrial and residential use
- IEC 60947 Low voltage switch gear and control gear
- IEC 60947-5-1 Electromechanical control circuit devices and switching elements
- IEC 60255 Relay design and environmental conditions
- CE

TDDB-relay

Technical specifications

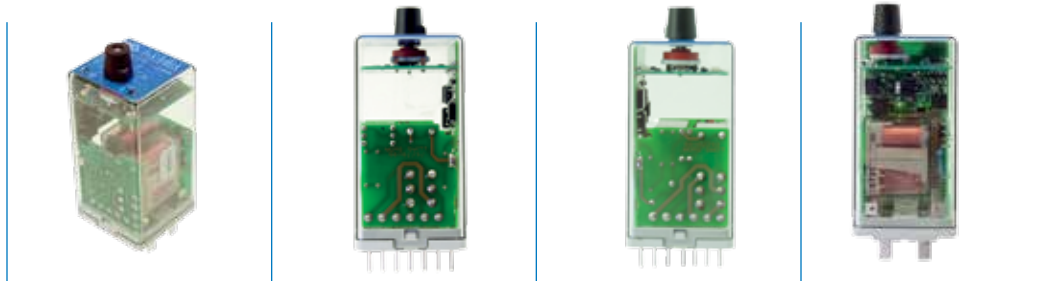

Functional and connection diagrams

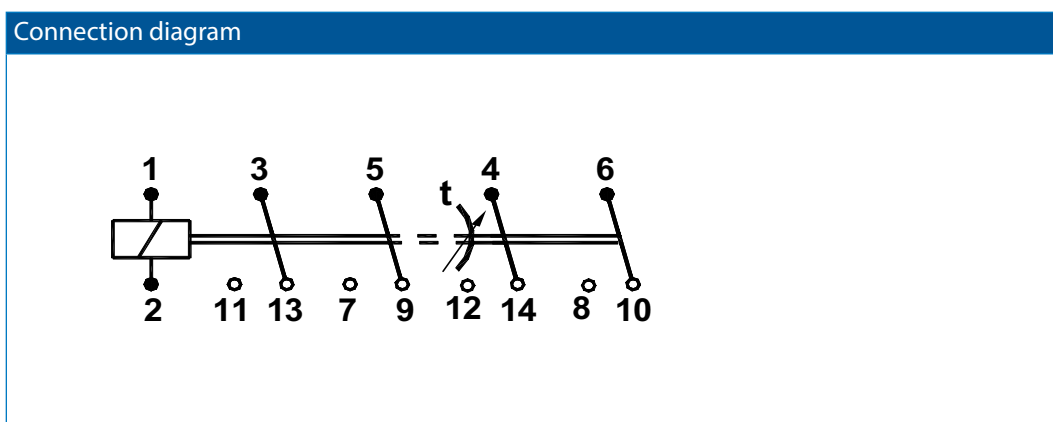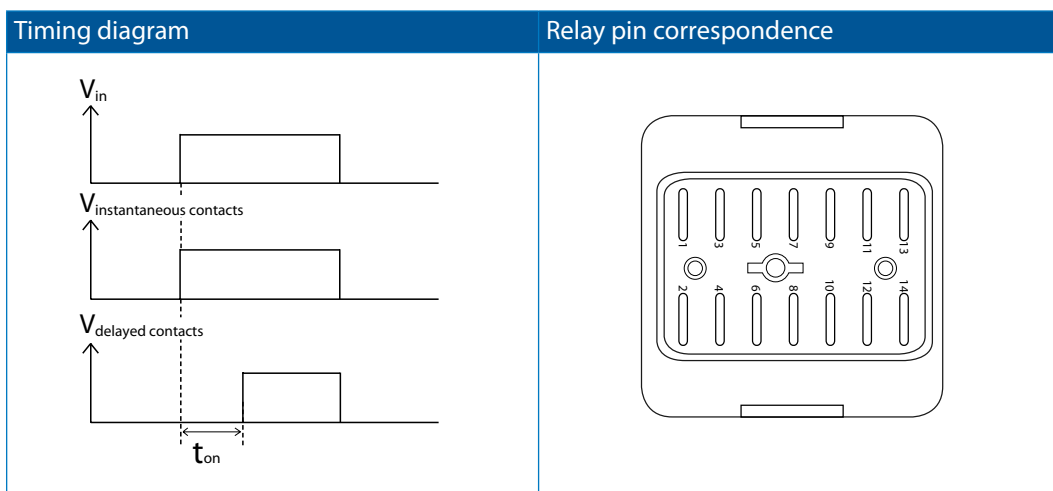

TDDB-relay

Technical specifications

Time delay specifications

Time delay function	Delay on pull-in and instantaneous
Available time ranges, adjustable (xx)	0.1...1 s 0.3...3 s 0.6...6 s 1...10 s 3...30 s 6...60 s 0.3...3 min 0.6...6 min 1 ...10 min 3...30 min 6...60 min
Accuracy - adjustment	Other time ranges on request < 10 % of full scale value After adjusting / fixed time setting : no variation in setpoint
Accuracy - repeatability	± 0.5 %
Time variation - vs. voltage variation	± 0.05 % / % U _{nom}
Time variation - vs. temperature variation	± 0.02 % / K
Recovery time	± 0.1 s
Pull-in time	Delayed contacts: depending on pull-in time setting (xx) Instantaneous contacts: < 15 ms
Release time	< 15 ms
<p>Example time delay : Time range 0.3...3 s Time delay set on 2 s : delay will be between 1.7 s...2.3 s. For example: 2.0 s. The ambient temperature is 40 degrees Celsius which is 20 degrees different compared to the standard 20 degrees Celsius. This results in 0.4 % extra time variation. The applied voltage is 20 % lower than the nominal voltage. This results in 1.0 % extra time variation. The total maximum time variation is then 0.5 % (repeatability) + 0.4 % (temperature variation) + 1.0 % (voltage variation) = 1.9 %. In this case every new time delay will be between 1.96 s and 2.04 s.</p>	

Coil characteristics

Operating voltage range	0.8...1.1 U _{nom}
Nominal power consumption	After time delay < 1.1 W/VA (24 V) < 1.5 W/VA (110 V) < 2.7 W/VA (220 V) Lower voltage = lower power
	During time delay < 0.6 W/VA (24 V) < 1.0 W/VA (110 V) < 1.7 W/VA (220 V) Lower voltage = lower power

Coil characteristics continued on next page.



TDDB-relay

Technical specifications

Type	U _{nom} (VAC/VDC)	U _{min} (VAC/VDC)	U _{max} (VAC/VDC)	U _{drop-out} (VAC/VDC)
TDDB-24	24	19.2	26.4	2.4
TDDB-48	48	38.4	52.8	4.8
TDDB-60	60	48.0	66.0	6.0
TDDB-110	110	88.0	121.0	11.0
TDDB-220	220	176.0	242.0	22.0

Other types on request

Remarks:

- U_{min} is the must-operate voltage at which the relay has picked up in all circumstances (worst case situation), in practice the relay picks up at a lower voltage
- U_{drop-out} is the must-release voltage at which the relay has dropped-out in all circumstances (worst case situation), in practice the relay drops out at a higher voltage (=U_{release})
- To reset the time function, the voltage must drop below U_{drop-out}
- AC voltage: 50/60 Hz
- Always select the nominal voltage as close as possible to the actual voltage in the application

Contact characteristics

Maximum make current	14 A
Maximum continuous current	8 A (AC1 ; IEC 60947)
Maximum switching voltage	300 VDC 250 VAC
Minimum switching voltage	12 V
Minimum switching current	100 mA
Maximum switching capacity and contact life	see graph page 6
Material	AgNi + 0.15 μm Au

Electrical characteristics

Dielectric strength	
Pole-pole	IEC 60255-5 2.5 kV, 50 Hz, 1 min
Cont-coil	IEC 60077 2.5 kV, 50 Hz, 1 min
Insulation between open contacts	1 kV; 50 Hz; 1 min

Mechanical characteristics

Mechanical life	20 x 10 ⁶ operations
Maximum switching frequency	Mechanical: 3600 ops/h Electrical: 1200 ops/h
Maximum torque value screw to lock knob	0.15 Nm
Weight	112 g (without options)




TDDB-relay

Technical specifications

Environmental characteristics

Environmental	EN 50125-1 and IEC 60077-1
Vibration	IEC 61373, Category I, Class B, Body mounted
Shock	IEC 61373, Category I, Class B, Body mounted
Operating temperature	-25 °C...+70 °C (with option C: -40 °C)
Humidity	93 %
Salt mist	IEC 60068-2-11, class ST4
Damp heat	IEC 60068-2-30, Test method Db variant 1
Protection	IEC 60529, IP40 (relay on socket)
Insulation materials	Cover: polycarbonate Base: polyester

Dimensions (mm)

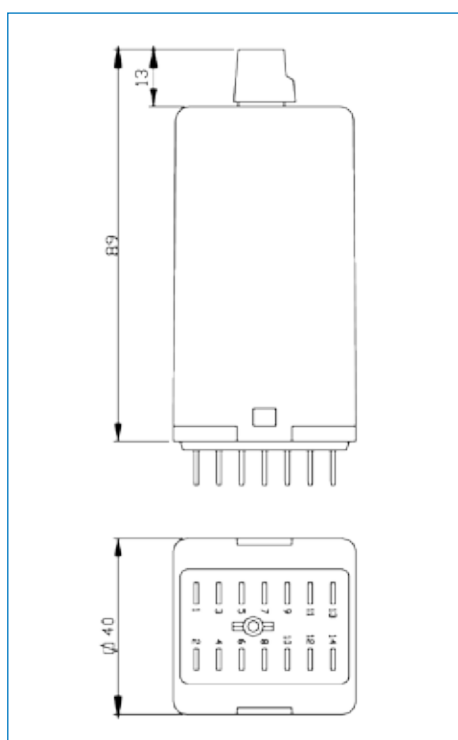

Options


Code	Description	Remark
C	Low temperature (-40 °C)	
Q	Double zener diode. Coil protection against transient voltage	Max. allowed peak voltage 180 V. Higher voltage will damage the diode



TDDB-relay

Technical specifications


Maximum breaking capacity

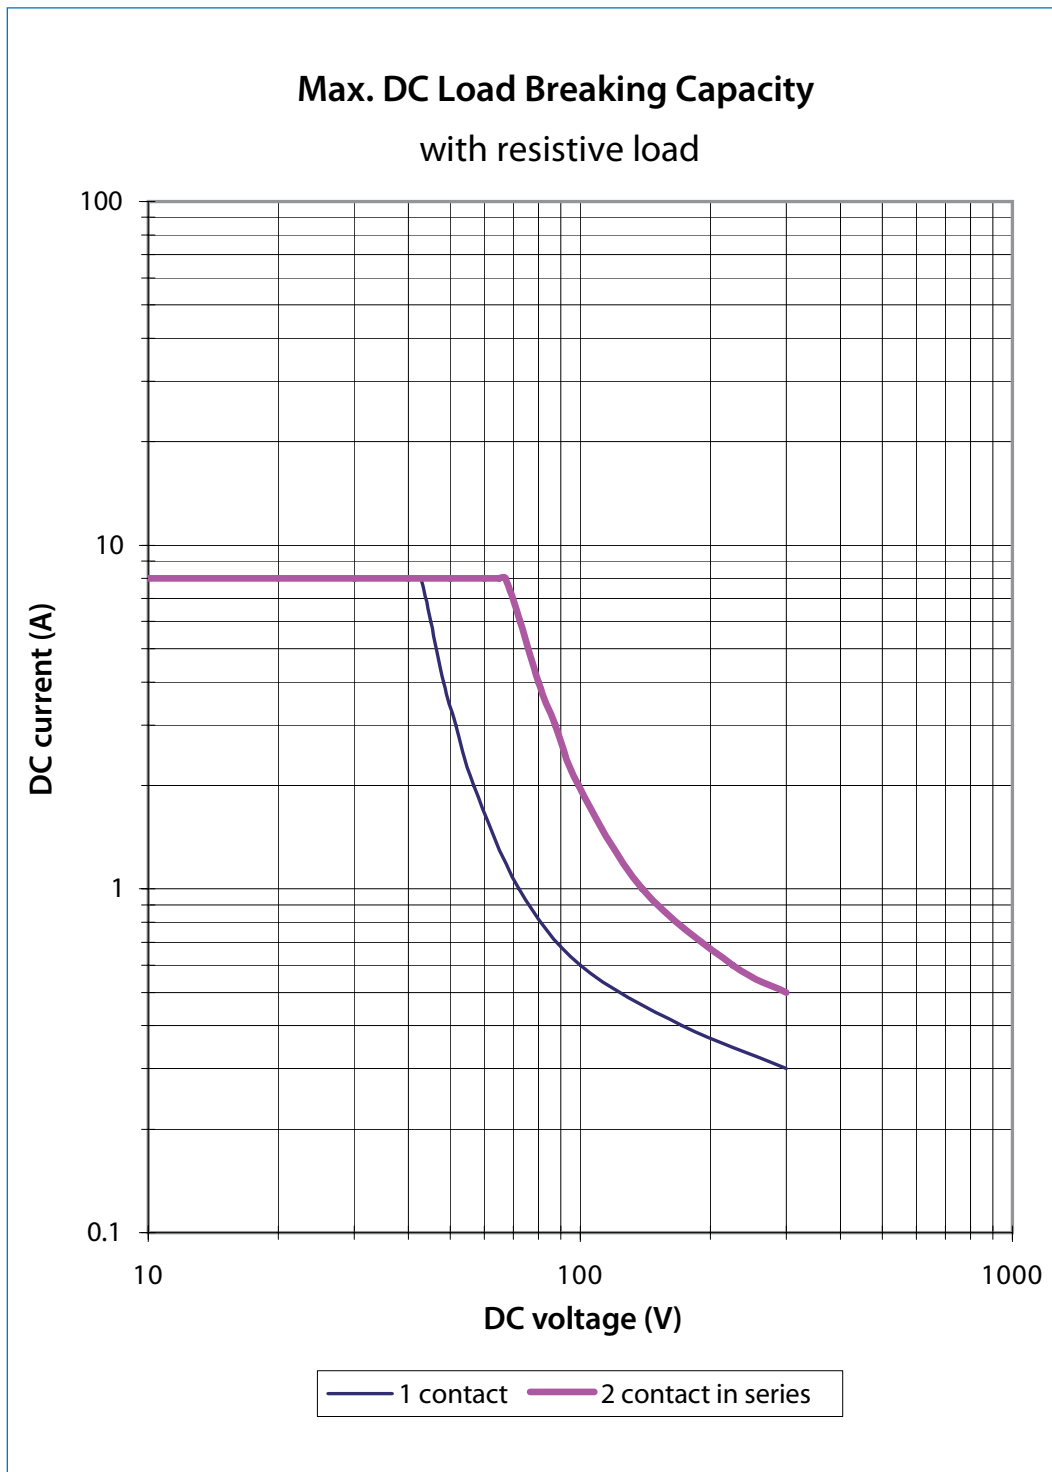

TDDB-relay


Technical specifications

Contact life

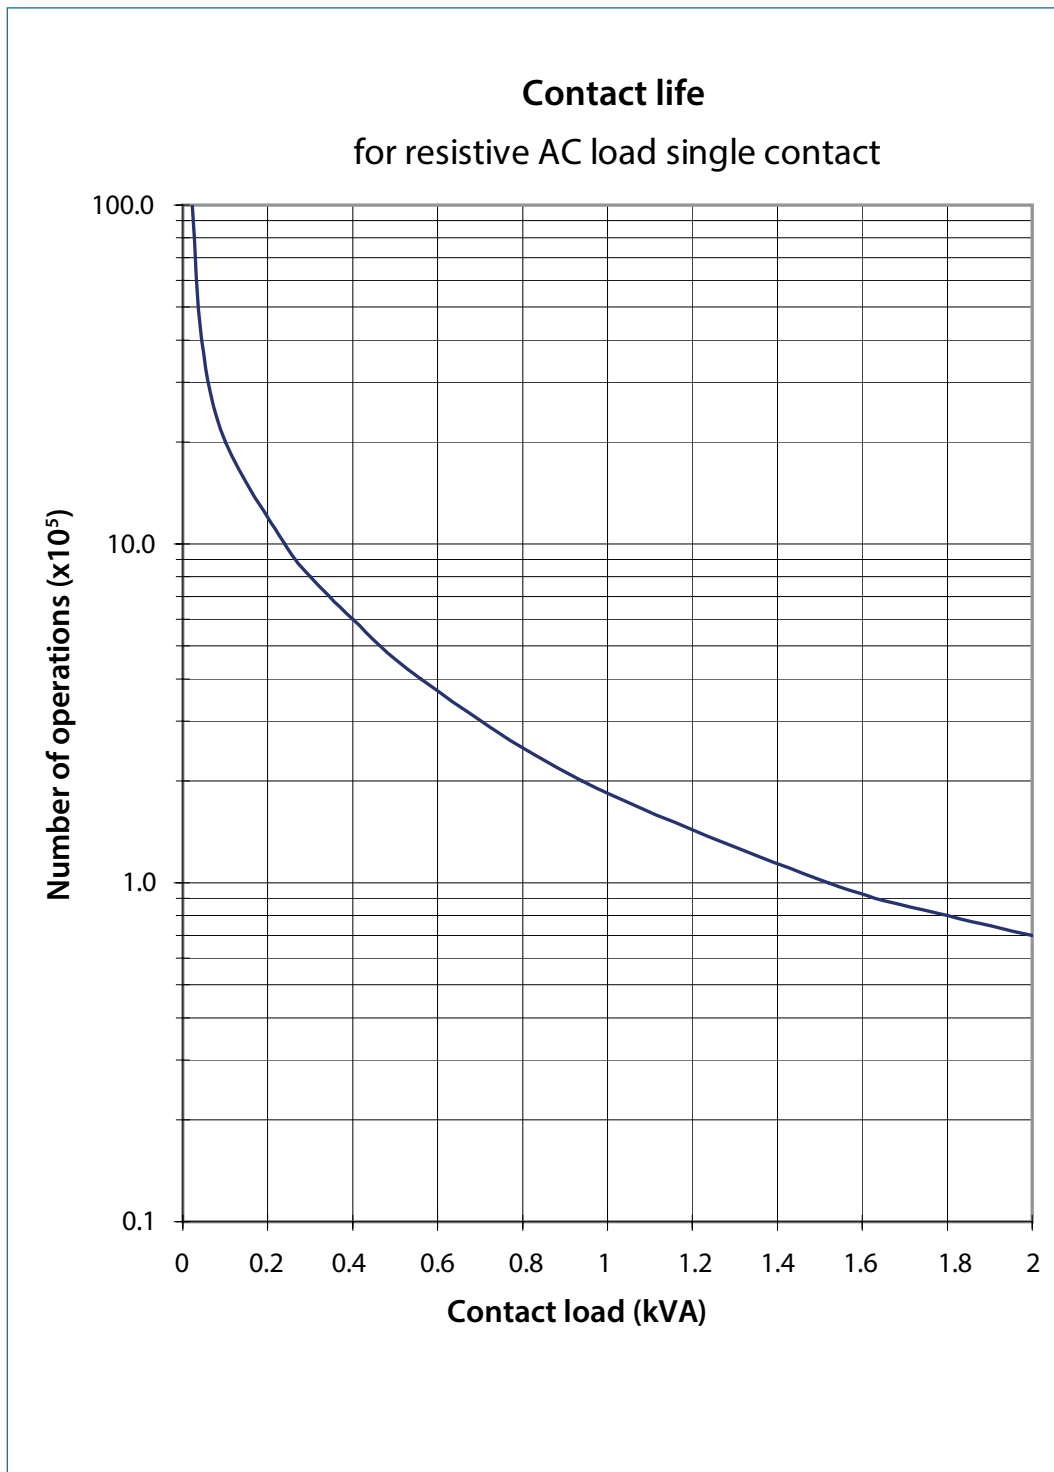

TDDB-relay Sockets

Mounting possibilities/sockets

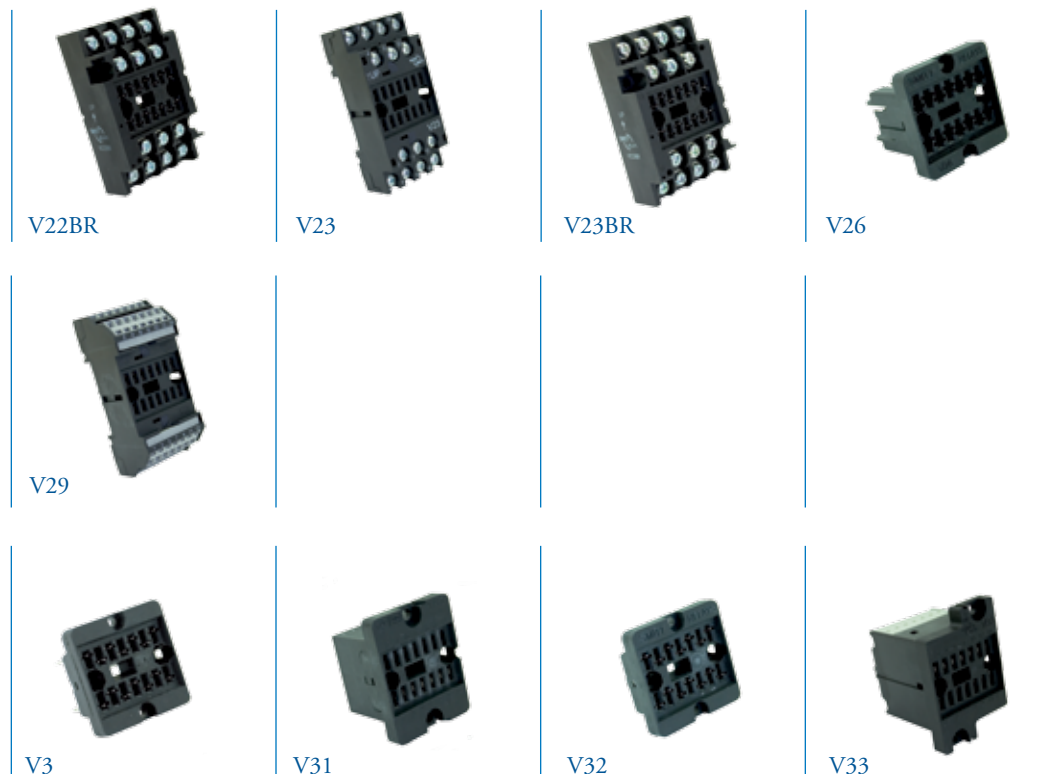

Surface/wall mounting

338000302	V22BR	Screw socket, wall mount, front connection (9 mm terminals)
338000580	V23	Screw socket, wall mount, front connection (7.5 mm terminals)
338000610	V29	Spring clamp socket, wall mount, front dual connection (2.5 mm ²)

Rail mounting

338000580	V23	Screw socket, rail mount, front connection (7.5 mm terminals)
338000402	V23BR	Screw socket, rail mount, front connection (9 mm terminals)
338000610	V29	Spring clamp socket, rail mount, front dual connection (2.5 mm ²)

Panel/flush mounting

338100100	V3	Solder tag socket, panel mount, rear connection
328400100	V26	Crimp contact socket, panel mount, rear connection
338000560	V31	Faston connection socket, rear dual connection (2 x 4.8 mm)
338000570	V33	Spring clamp socket, flush mount, rear dual connection (2.5 mm ²)


PCB mounting

338000561	V32	PCB soldering socket
-----------	-----	----------------------



TDDB-relay Keying

Mechanical keying relay and socket (optional)

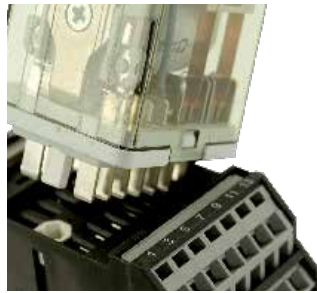


Function:

- To prevent wrong installation
- To prevent damage to equipment
- To prevent unsafe situations

Using keyed relays and sockets prevents a relay is inserted in a wrong socket. For example it prevents that a 24 VDC relay is put in a 110 VDC circuit. Positive discrimination is possible per different function, coil voltage, timing, monitoring, safety and non-safety.

The D-relay socket keying option gives $8 \times 8 = 64$ possibilities. Upon ordering the customer simply indicates the need for the optional keying. Mors Smitt will assign a code to the relay and fix the pins into the relay. The sockets are supplied with loose key receptacles. Inserting the keys into the socket is very simple and self explaining.

Remark: Sockets and relay shown are only examples.

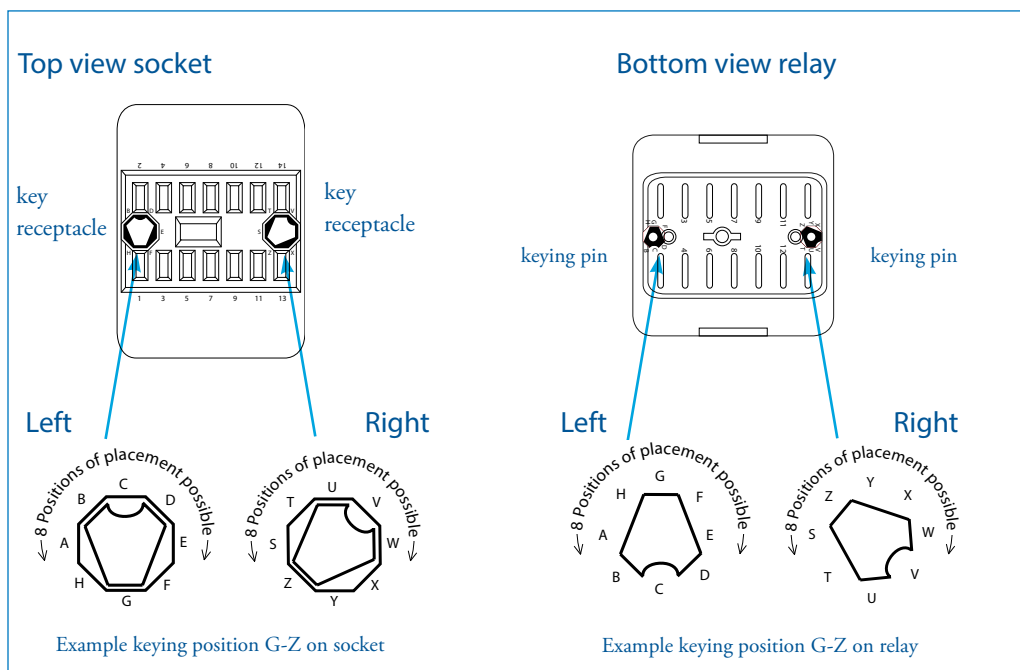

TDDB-relay Instructions

Installation, operation & inspection


Installation

Before installation or working on the relay: disconnect the power supply first! Install socket and connect wiring according to the terminal identification. Plug relay into the socket ensuring there is no gap between the bottom of relay and the socket. Reverse installation into the socket is not possible due to the mechanical blocking snap-lock feature. Check to ensure that the coil connection polarity is not reversed. Relays can be mounted tightly together to save space.

When rail mounting is used, always mount the socket in the direction of the UP arrow, to have proper fixation of the socket on the rail.

Warning!

- Never use silicon in the proximity of the relays.
- Do not use the relay in the presence of flammable gas as the arc generated from switching could cause ignition.
- To remove relays from the socket, employ up and down lever movements. Sideway movement may cause damage to the coil wires.

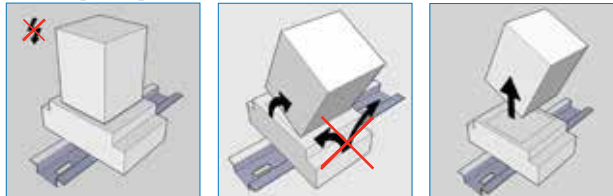

Operation

After installation always apply the rated voltage to the coil to check correct operation.

Long term storage may corrode the silver on the relay pins. When plugging the relay into the socket, the female bifurcated or trifurcated receivers will automatically cut through the corrosion on the pins and guarantee a reliable connection.

Before actual use of relays, it is advised to switch the load several times with the contacts. The contacts will both be electrically and mechanically cleaned due to the positive wiping action. Sometimes a contact can build up increased contact resistance ($\leq 15 \text{ m}\Omega$ when new). When using silver contacts one can clean the contact by switching a contact load a few times using $>24 \text{ VDC}$ & $\sim 2 \text{ A}$. Increased contact resistance is not always problematic, as it depends on circuit conditions. In general a contact resistance of 1Ω is no problem, consult Mors Smitt for more information.

Condensation in the relay is possible when the coil is energised (warm) and the outside, environmental temperature is cold. This is a normal phenomenon and will not affect the function of the relay. Materials in the relay have no hygroscopic properties.

Inspection

Correct operation of the relay can easily be checked as the transparent cover provides good visibility of the moving contacts. If the relay does not seem to operate correctly, check for presence of the appropriate coil voltage and polarity using a suitable multimeter. If a LED is fitted, it indicates voltage presence to the coil. If coil voltage is present, but the relay does not operate, a short circuit of the suppression diode is possible (This may be due to the coil connection having been reversed).

If the relay doesn't work after inspection, replace the relay unit with a similar model. Do not attempt to open the relay cover or try to repair. Contacts are calibrated and in balance, touching can affect proper operation. Also re soldering may affect correct operation. Since 2009 relays have tamper proof seals fitted and once broken, warranty is void.

Most relay defects are caused by installation faults such as over voltage, spikes/transients, high/short current far exceeding the relay specifications. When returning the relays for investigation, please provide all information on the RMA form. Send defective relays back to the manufacturer for repair or replacement. Normal wear and tear or external causes are excluded from warranty.



TDDB-relay

Ordering scheme

TDDB - **24 VAC/DC** - **C** **1...10 s**

1. Relay model

2. Coil voltage

3. Option

4. Time range

This example represents a **TDDB-24 VAC/DC - C 1...10 s**

Description: TDDB-relay, U_{nom} : 24 VAC/DC, low temperature, time range 1...10 s

1. Relay model

TDDB

2. Coil voltages

24 VAC/DC
48 VAC/DC
60 VAC/DC
110 VAC/DC
220 VAC/DC

Remark: 50/60 Hz AC voltage

3. Options

C Low temperature (-40 °C)
Q Double zener diode

4. Time range

0.1...1 s	0.6...6 min
0.3...3 s	1...10 min
0.6...6 s	3...30 min
1...10 s	6...60 min
3...30 s	
6...60 s	
0.3...3 min	or fixed (no knob)

Upon ordering indicate keying if necessary.





Mors Smitt France SAS

Tour Rosny 2, Avenue du Général de Gaulle,
F - 93118 Rosny-sous-Bois Cedex, FRANCE
T +33 (0)1 4812 1440, F +33 (0)1 4855 9001
E sales.msf@wabtec.com

Mors Smitt Asia Ltd.

29/E, Fun Tower, 35 Hung To Road
Kwun Tong, Kowloon, HONG KONG SAR
T +852 2343 5555, F +852 2343 6555
E sales.msa@wabtec.com

Mors Smitt B.V.

Vrieslantlaan 6, 3526 AA Utrecht,
NETHERLANDS
T +31 (0)30 288 1311, F +31 (0)30 289 8816
E sales.msbv@wabtec.com

Mors Smitt Technologies Inc.

1010 Johnson Drive,
Buffalo Grove, IL 60089-6918, USA
T +1 847 777 6497, F +1 847 520 2222
E salesmst@wabtec.com

Mors Smitt UK Ltd.

Graycar Business Park, Barton under Needwood,
Burton on Trent, Staffordshire, DE13 8EN, UK
T +44 (0)1283 722 650 F +44 (0)1283 722 651
E sales.msuk@wabtec.com