

Datasheet


SOCKET

Product V3 Relay socket

Article code 338100100

Country of Origin: The Netherlands

Dimensions

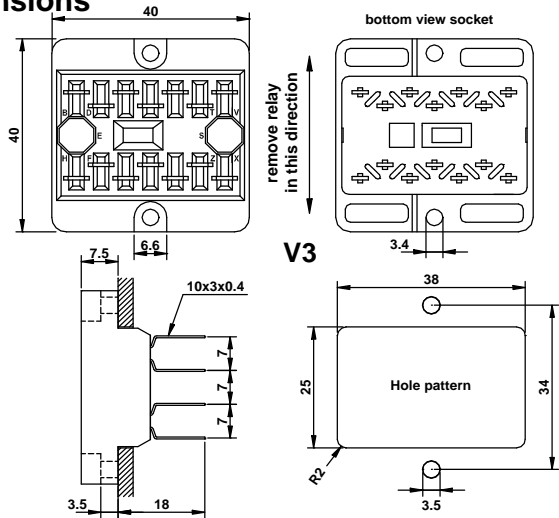

P.O. Box 7023
 3502 KA Utrecht
 The Netherlands
T +31 (0)30-288 13 11
F +31 (0)30-289 88 16
E sales@nieaf-smitt.nl
I www.nieaf-smitt.nl

Description

Panel / flush-mount relay socket for soldering wires onto solder tags.
 Suitable for D-type relays

Contact rating	10 A (AC1)	IEC 947
Dielectric strength	2500 V; 50 Hz; 1 min	IEC 255/ IEC 571
Protection category	IP 20, relay-side	IEC 529
Mounting	panelmounting	
Max ambient temperature	80 °C	
Weight	V3 22 g	
Wire diameter	max. 1.5 mm	
Material	Polyamide 6.6 30 % glass	Class 2 according to NF F 16-101 and 102
Options	Key possibility	
Accessory	Key receptacle A104	