


**Datasheet**

**SOCKET**

**Product** **V28/ V29**  
 Relay socket with double deck  
 cage clamp spring terminals

**Country of Origin:**

**Dimensions**

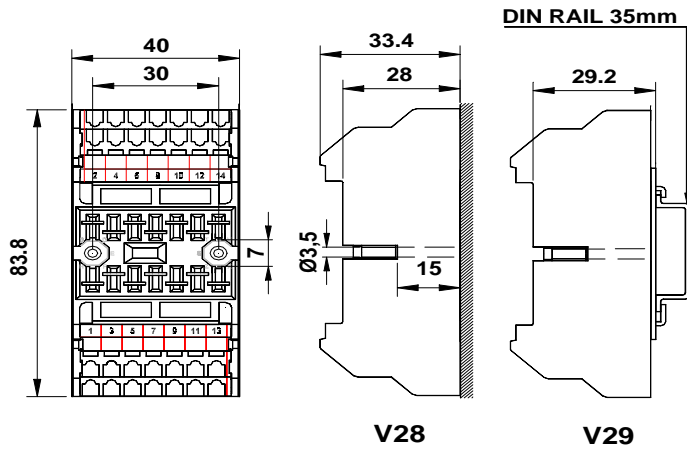

P.O. Box 7024  
 3503 KA Utrecht  
 The Netherlands  
**T** +31 (0)30-288 13  
**F** +31 (0)30-289 88  
**E** sales@nieaf-smit  
**I** www.nieaf-smitt.n

**Description**

Base with two high reliable cage clamp spring (WAGO) terminals per relay contact  
 For solid and (fine) stranded wires up to 2.5 mm<sup>2</sup>  
 Quick connection by pressing the cage clamp with a flat-bladed screw driver and insert the stripped wire  
 Suitable for D and D-U relays.  
 Pinning on the socket complies with the pinning on the relay.

<b>Contact rating</b>	<b>10 A (AC1)</b>	<b>IEC 947</b>
<b>Dielectric strength</b>	<b>2500 V; 50 Hz; 1 min</b>	<b>IEC 255/ IEC 571</b>
<b>Protection category</b>	<b>IP 20</b>	<b>IEC 529</b>
<b>Mounting</b>	<b>V28 panelmounting</b> <b>V29 DIN rail</b>	<b>DIN EN 50022</b>
<b>Max ambient temperature</b>	<b>80 °C</b>	
<b>Weight</b>	<b>V28 78 g</b> <b>V29 100 g</b>	
<b>Wire diameter</b>	<b>0.08 - 2.5 mm<sup>2</sup></b>	
<b>Material</b>	<b>Polyamide 6.6</b> <b>30 % glass</b>	<b>Class 2 according to NF F 16-1</b>
<b>Options</b>	<b>Key possibility</b>	
<b>Accessory</b>	<b>Key receptacle A104</b>	

The Netherlands



12  
17  
t.nl  
l

ing

101 and 102