


Datasheet

SOCKET

Product	V98/ V99		Country of Origin:
Article code	V98	338003915	
	V99	338003910	



Dimensions

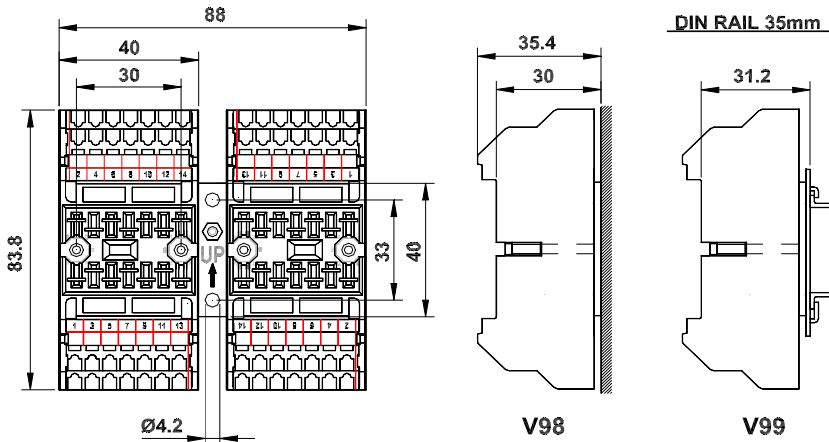

P.O. Box 7023
 3502 KA Utrecht
 The Netherlands
T +31 (0)30-288 13
F +31 (0)30-289 88
E sales@nieaf-smit
I www.nieaf-smitt.n

Description

Base with two high reliable cage clamp spring (WAGO) terminals per relay contact
 For solid and (fine) stranded wires up to 2.5 mm²
 Quick connection by pressing the cage clamp with a flat-bladed screw driver and insert the stripped wire
 Suitable for D and D-U relays.

Contact rating	10 A (AC1)	IEC 947
Dielectric strength	2500 V; 50 Hz; 1 min	IEC 255/ IEC 571
Protection category	IP 20	IEC 529
Mounting	V98 panelmounting V99 DIN rail	DIN EN 50022
Max ambient temperature	80 °C	
Weight	V98 268 g V99 290 g	
Wire diameter	0.08 - 2.5 mm²	
Material	Polyamide 6.6 30 % glass	Class 2 according to NF F 16-1
Options	Key possibility	
Accessory	Key receptacle A104	

The Netherlands



11
16
t.nl
l

ting

101 and 102