


# Magnum 6K32T Configuration Guide



**Magnum 6K32T Managed Switch, base unit** with 16 fixed 10/100 copper ports and two optional port module slots. The two module slots may be configured with any of the modules below, or may be unpopulated. Wire speed filtering and forwarding across all ports, 802.3x flow control, 802.1p priority packet processing, self learning 4K-node address table, 240KB packet buffers. 19" rack-mounting brackets included.

*Note: MNS-6K software license is included with Base Unit. The software is loaded in the 6K32T at the factory.*

## Step 1. Choose 6K32T chassis and power input type:

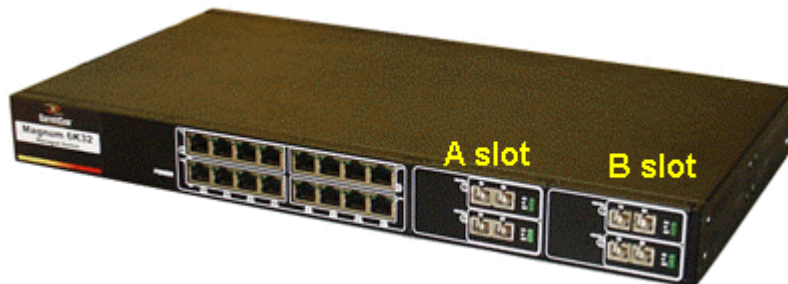

Model #	Base Unit, Description
6K32T	Rack-mount with AC Power
6K32T-24 VDC	Rack-mount with 24V (18-36) DC power
6K32T-48 VDC	Rack-mount with -48V (36-70) DC power
6K32T-125 VDC	Rack-mount with 125V (88-150) DC power
DUAL SRC	Two separate DC power inputs (24/48 or 125V)

## Step 2. Choose 1 module for slot A and/or B (may be blank):

Module Model #	10/100	10BASE-FL	100BASE-FX(MM)	100BASE-FX(SM)	Gigabit
6KP8-RJ45	8				
6KP8-45-2MT	6		2 (MTRJ)		
6KP8-45-2SLC	6			2 (15km LC)	
6KP6-RJ10ST	4	2 (ST)			
6KP6-RJMST	4		2 (ST)		
6KP6-RJMST	4		2 (SC)		
6KP6-RJSSC	4			2 (20km SC)	
6KP6-RJSSCL	4			2 (40km SC)	
6KP8-45MT	4		4 (MTRJ)		
6KP8-45MLC	4		4 (LC)		
6KP8-45SLC	4			4 (15km LC)	
6KP4-F10ST		4 (ST)			
6KP4-FLSTFX		2 (ST)	2 (ST)		
6KP4-FXST			2 (ST)		
6KP4-FXSC			2 (SC)		
6KP6-MT10ST		2 (ST)	4 (MTRJ)		
6KP8-MTRJ			8 (MTRJ)		
6KP8-MLC			8 (LC)		
6KP8-SLC				8 (15km LC)	
<i>Gigabit Modules using GBICs (see Step 3)</i>					
6KP5-G4RJ	4				1 GBIC
6KP3-G2SC			2 (SC)		1 GBIC
GBPM-COTX					1 GBIC
GBPM-2OTX					2 GBIC
<i>Gigabit Modules, fixed ports</i>					
6KP2-2GSX					2 SX
6KP2-2GCU					2 CU
6KP5-1CU4MT			4 (MTRJ)		1 CU
6KP3-1CU2FXT			2 (ST)		1 CU
6KP5-1CU4RJ	4				1 CU

## Step 3 (Opt). Choose GBICs for Gigabit Ports using COTX & 2OTX:

Model #	Description (Ports for GBPM-COTX / 6KP5-G4RJ/ 6KP3-G2SC)
GBIC-SXSC	One 1000BASE-SX port with m.m. SC fiber connector
GBIC-LXSC10	One 1000BASE-LX/LH port 1310nm s.m. SC 10Km
GBIC-LXSC25	One 1000BASE-LX/LH port 1310nm s.m. SC 25Km
GBIC-TP	One IEEE 802.3ab TP port, RJ-45 connector
GBIC-ZXSC40	One 1000BASE-ZX port 1550nm s.m. SC 40Km
GBIC-ZXSC70	One 1000BASE-ZX port 1550nm s.m. SC 70Km

## Step 4. Choose options & extras:

Model #	Description
6KM-BLNK	Blank cover for 1 unused (A) module slot
DUAL-SRC	Two separate power inputs (24/ 48/ or 125V)
ALARM TERMBLK	Alarm contacts, 1 power and 1 software
S-RING KEY	Software, self-healing ring management
RMB-23W	23" 'Telco' rack-mount kit (1U)
RMB-ETSI	ETSI rack-mount kit (1U)
CONSOLE CBL	Console attachment cable serial null Modem (aka X-modem) cable with DB9 connectors
CONSOLE USB	As above, but with a USB connector
CONFORMAL CR	Conformal coating – request quote